

# 4Ch Standalone DVR

## DHV-410MLU

4ch DVR with Internal HDD  
USB 2.0 Interface



## DHV-410ML

4ch DVR with internal HDD



## SPECIFICATIONS


	DHV-410MLU		DHV-410ML	
	PAL	NTSC	PAL	NTSC
Video Input Channel	4 Camera input, Composite 1vp-p/75Ω(BNC)			
Video Output Channel	2 output, Composite 1vp-p/75Ω(BNC)			
HDD Storage	IDE type, Maximum:200GB HDD x 2 (Up to 400GB) 2 internal HDD			
O.S.D On Screen Display	Yes			
Recording Field Rate (Quad Mode)	Real Time			
Display Field	Real Time			
Recording Field Rate (Dual Mode)	50 fields per second / 4 channel, adjustable	60 fields per second / 4 channel, adjustable	50 fields per second / 4 channel, adjustable	60 fields per second / 4 channel, adjustable
Record Mode	Continuous, Manual, Sensor alarm, Event / Programmable			
Record History	64 Events			
Resolution	Display: PAL: 720 x 576 ; NTSC: 720 x 486 ; 520TV Lines Recording: PAL: 720 x 576 ; NTSC: 720 x 486 ; 520 TV Lines			
Compression Format(Each channel)	MJPEG ; High, Normal, Low Quality / Adjustable			
Back-up (Archive Device)	Removable HDD, VCR, PC		Removable HDD, VCR	
USB Port	2.0		Not available	
Playback Searching	Index, Event, Time, Date, Camera			
Hardware WatchDog	Yes			
Motion Detection	Yes			
Alarm In/Out	4 Input (NO / NC / NOT) ; 1 Output (NO)			
Playback Speeds	1x, 2x, 4x, 8x			
Alarm Recording Duration	30/25/20/15/10/5 Secs.			
Alarm Duration	Continuous /30/25/20/15/10/5/0 Secs.			
Sensor-to-Trigger Recording	By sensor or microwave sensor			
Security	Formatting HDD protected by password			
Security Lock	Yes			
Power Supply	90~260Vac switching power, 33Watts			
Operation Temperature	-10° C ~ 45° C			
Dimensions (W x D x H)	430 x 265 x 44.4 mm / 17 x 10.5 x 1.75inch			
Net Weight (Without HDD)	4.5kg			

\* Designs & Specifications are subject to change without notice.


## DIMENSIONS

DHV-410MLU

◆ Front View




DHV-410MLU

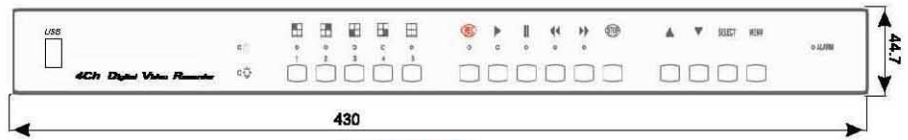

DHV-410ML

◆ Rear View



AC 90-260V Version